


Calvert Attic Stairs™  
 Aluminum folding attic stairs model 4085, 4095

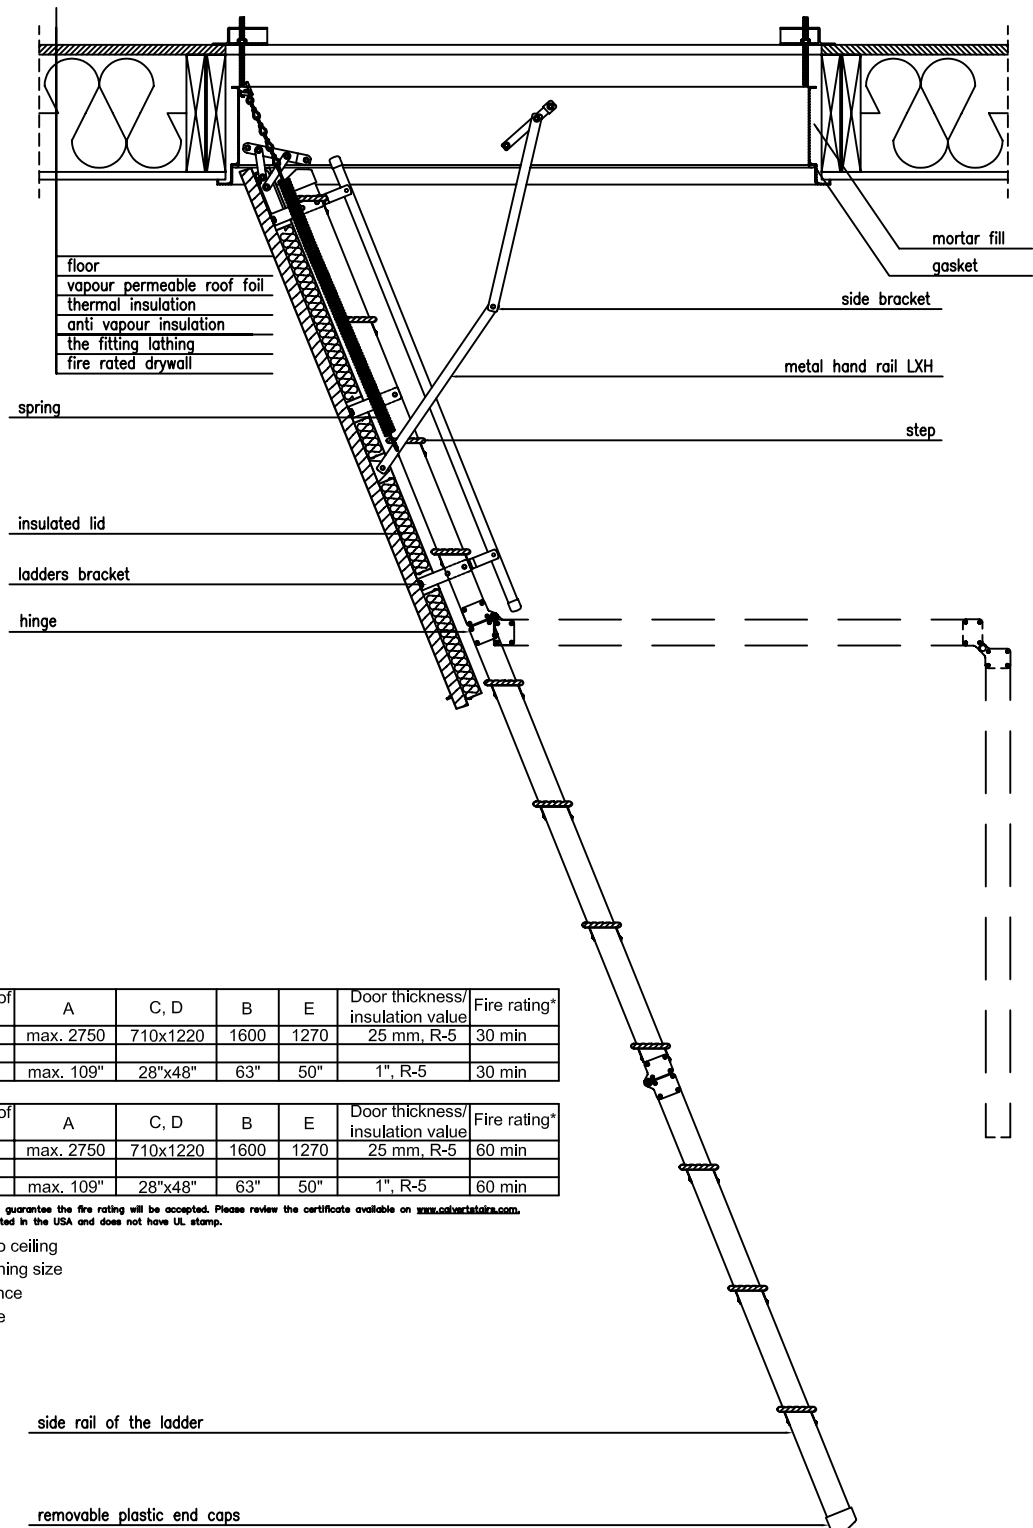

Model No.	Number of steps	A	C, D	B	E	Door thickness/insulation value	Fire rating*
4085	11	max. 2750	710x1220	1600	1270	25 mm, R-5	30 min
4085	11	max. 109"	28"x48"	63"	50"	1", R-5	30 min

Model No.	Number of steps	A	C, D	B	E	Door thickness/insulation value	Fire rating*
4095	11	max. 2750	710x1220	1600	1270	25 mm, R-5	60 min
4095	11	max. 109"	28"x48"	63"	50"	1", R-5	60 min

\* Calvert USA, Inc. Does not guarantee the fire rating will be accepted. Please review the certificate available on [www.calvertstairs.com](http://www.calvertstairs.com). Product has not been tested in the USA and does not have UL stamp.

- A - height floor to ceiling
- C,D - rough opening size
- B - swing clearance
- E - landing space

Model:	Architect:	Calvert USA, Inc. <a href="http://www.calvertusa.com">www.calvertusa.com</a>
Date:	Project:	P.O. Box 841, Solomons, MD 20688
Purchase order:	Location:	866.477.8455, Fax 410.326.8498