


Calvert Attic Stairs™  
 Aluminum folding attic stairs model 4086, 4096

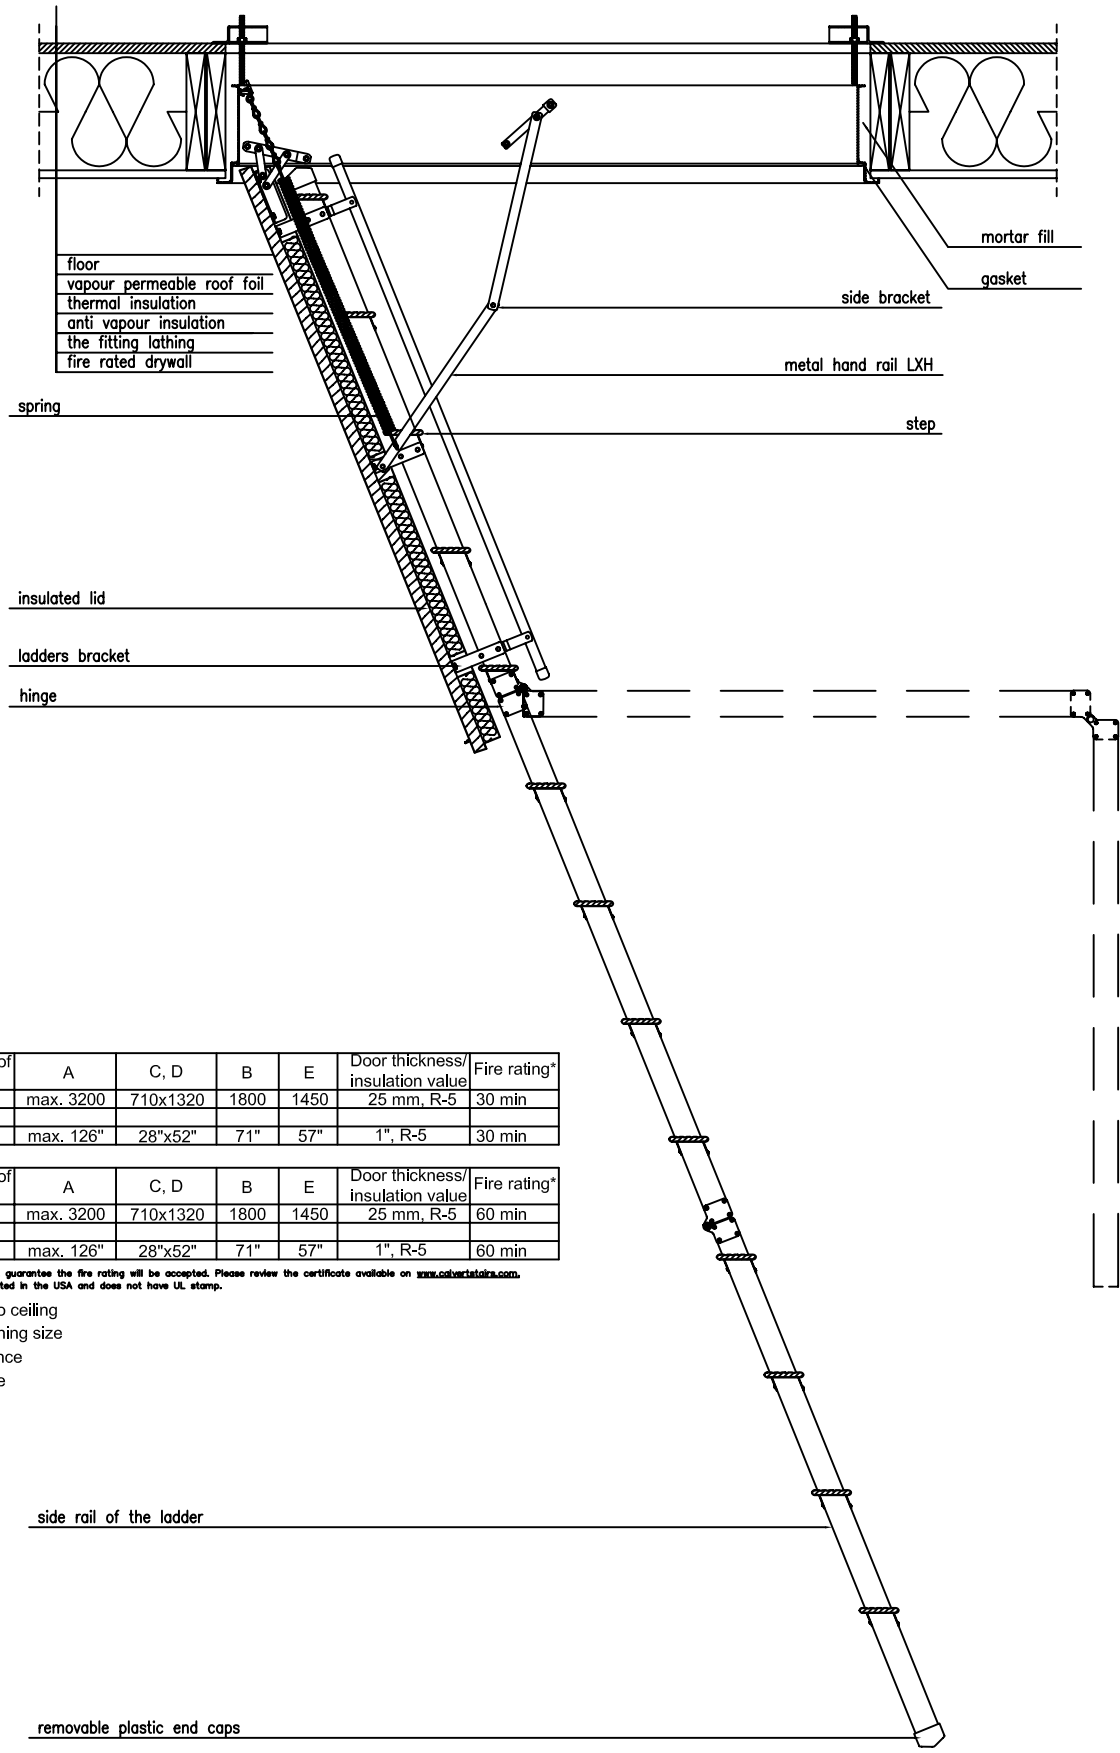

Model No.	Number of steps	A	C, D	B	E	Door thickness/insulation value	Fire rating*
4086	13	max. 3200	710x1320	1800	1450	25 mm, R-5	30 min
4086	13	max. 126"	28"x52"	71"	57"	1", R-5	30 min

Model No.	Number of steps	A	C, D	B	E	Door thickness/insulation value	Fire rating*
4096	13	max. 3200	710x1320	1800	1450	25 mm, R-5	60 min
4096	13	max. 126"	28"x52"	71"	57"	1", R-5	60 min

\* Calvert USA, Inc. Does not guarantee the fire rating will be accepted. Please review the certificate available on [www.calvertstairs.com](http://www.calvertstairs.com). Product has not been tested in the USA and does not have UL stamp.

- A - height floor to ceiling
- C,D - rough opening size
- B - swing clearance
- E - landing space

side rail of the ladder

removable plastic end caps

Model:	Architect:	Calvert USA, Inc. <a href="http://www.calvertusa.com">www.calvertusa.com</a>
Date:	Project:	P.O. Box 841, Solomons, MD 20688
Purchase order:	Location:	866.477.8455, Fax 410.326.8498