


Calvert Attic Stairs™
 Aluminum folding attic stairs model 4087, 4097

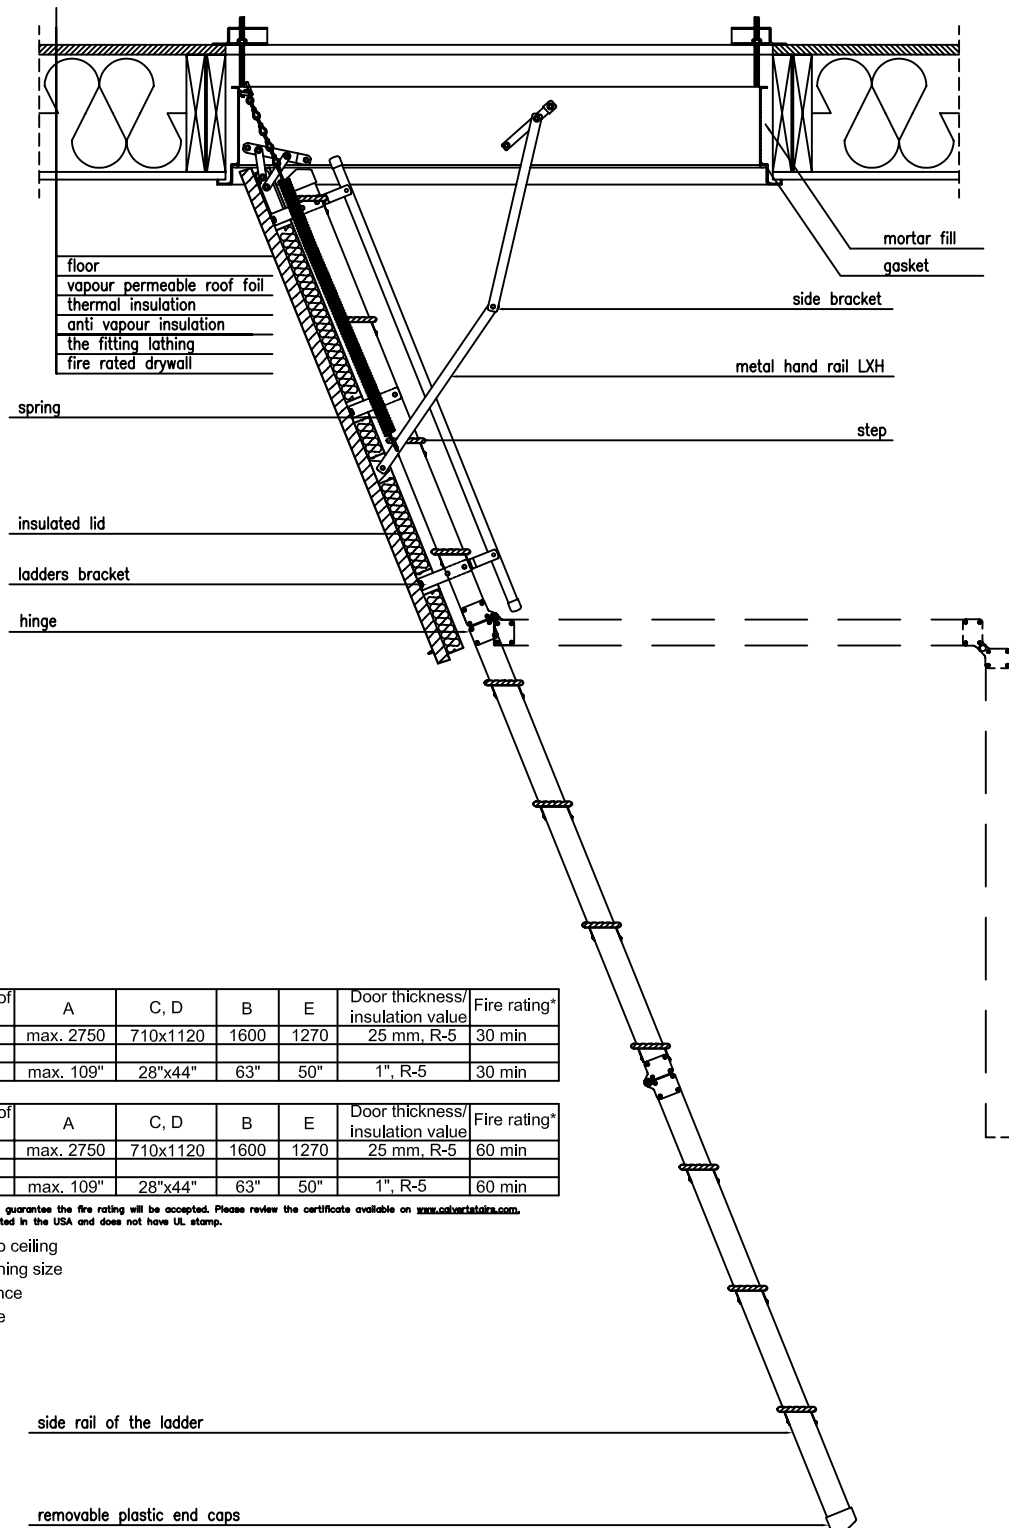

Model No.	Number of steps	A	C, D	B	E	Door thickness/insulation value	Fire rating*
4087	11	max. 2750	710x1120	1600	1270	25 mm, R-5	30 min
4087	11	max. 109"	28"x44"	63"	50"	1", R-5	30 min

Model No.	Number of steps	A	C, D	B	E	Door thickness/insulation value	Fire rating*
4097	11	max. 2750	710x1120	1600	1270	25 mm, R-5	60 min
4097	11	max. 109"	28"x44"	63"	50"	1", R-5	60 min

* Calvert USA, Inc. Does not guarantee the fire rating will be accepted. Please review the certificate available on www.calvertstairs.com. Product has not been tested in the USA and does not have UL stamp.

- A - height floor to ceiling
- C,D - rough opening size
- B - swing clearance
- E - landing space

side rail of the ladder

removable plastic end caps

Model:	Architect:	Calvert USA, Inc. www.calvertusa.com
Date:	Project:	P.O. Box 841, Solomons, MD 20688
Purchase order:	Location:	866.477.8455, Fax 410.326.8498